


LOGISTIC REGRESSION MODEL

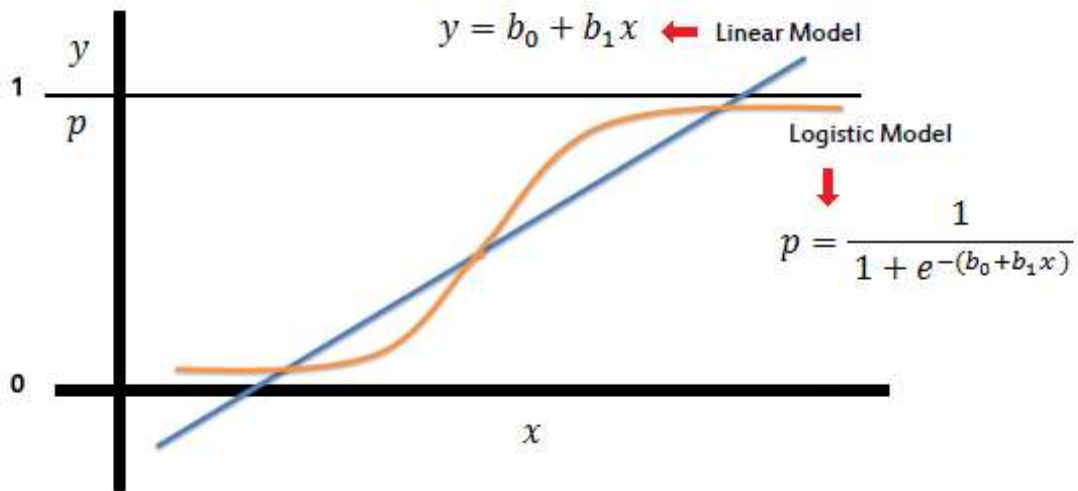

Predicting whether a customer of a certain bank shall churn or not based on multiple parameters using a Logistic Regression Model.

Date	29/03/2020
Name	Vinit Ravichandran Iyer
	Ashmitha Nagesh


Content List

Sr No	Description	Page No
1	Introduction	3
2	Source Code	4
3	Coefficient Output	33
4	Inference	33

Introduction

In statistics, the logistic model (or logit model) is used to model the probability of a certain class or event existing such as pass/fail, win/lose, alive/dead or healthy/sick. This can be extended to model several classes of events such as determining whether an image contains a cat, dog, lion, etc. Each object being detected in the image would be assigned a probability between 0 and 1, with a sum of one. Logistic regression is a statistical model that in its basic form uses a logistic function to model a binary dependent variable.

Logistic Regression is used when the dependent variable(target) is categorical. For example, To predict whether an email is spam (1) or (0), whether the tumour is malignant (1) or not (0), etc. Linear regression is unbounded, and this brings logistic regression into picture. Their value strictly ranges from 0 to 1.

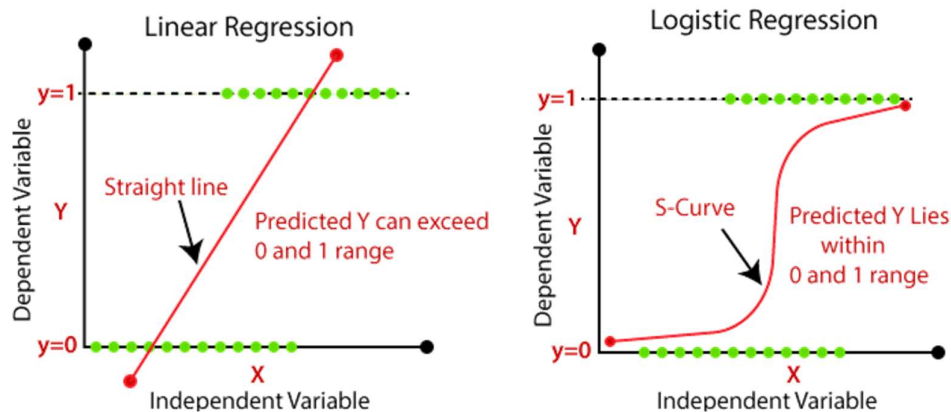

The output from the hypothesis is the estimated probability. This is used to infer how confident can predicted value be actual value when given an input X. Data is fit into linear regression model, which then be acted upon by a logistic function predicting the target categorical dependent variable. Logistic Regression is of 3 types:

- Binary Logistic Regression
- Multinomial Logistic Regression
- Ordinal Logistic Regression

The following code is of a Binary Logistic Regression which answers the possibility of whether a customer would “churn” or not based on multiple parameters such as the credit score of the current month, past month, current month balance, etc.

Source Code

1. Importing Libraries

Input	<pre>import pandas as pd import matplotlib.pyplot as plt import seaborn as sea import numpy as np import warnings warnings.filterwarnings(action = 'ignore')</pre>
-------	---


2. Importing the Dataset

Input	<pre>data = pd.read_csv("churn_prediction.csv")</pre>
Input	<pre>data.head(5)</pre>

Output

	customer_id	vintage	age	gender	dependents	occupation	city	customer_nw_category	branch_code	current_balance	...	average_monthly_balance_r
0	1	2101	66	Male	0.0	self_employed	187.0	2	755	1458.71	...	14
1	2	2348	35	Male	0.0	self_employed	NaN	2	3214	5390.37	...	77
2	4	2194	31	Male	0.0	salaried	146.0	2	41	3913.16	...	49
3	5	2329	90	NaN	NaN	self_employed	1020.0	2	582	2291.91	...	20
4	6	1579	42	Male	2.0	self_employed	1494.0	3	388	927.72	...	16

5 rows × 21 columns




3. Studying the Dataset

Input	<pre>data.head()</pre>
-------	------------------------

Output

	customer_id	vintage	age	gender	dependents	occupation	city	customer_nw_category	branch_code	current_balance	...	average_monthly_balance_r
0	1	2101	66	Male	0.0	self_employed	187.0	2	755	1458.71	...	14
1	2	2348	35	Male	0.0	self_employed	NaN	2	3214	5390.37	...	77
2	4	2194	31	Male	0.0	salaried	146.0	2	41	3913.16	...	49
3	5	2329	90	NaN	NaN	self_employed	1020.0	2	582	2291.91	...	20
4	6	1579	42	Male	2.0	self_employed	1494.0	3	388	927.72	...	16

5 rows × 21 columns




Input	<pre>data.tail()</pre>
-------	------------------------

Output

	customer_id	vintage	age	gender	dependents	occupation	city	customer_nw_category	branch_code	current_balance	...	average_monthly_balar
28377	30297	2325	10	Female	0.0	student	1020.0	2	1207	1076.43	...	
28378	30298	1537	34	Female	0.0	self_employed	1046.0	2	223	3844.10	...	
28379	30299	2376	47	Male	0.0	salaried	1096.0	2	588	65511.97	...	
28380	30300	1745	50	Male	3.0	self_employed	1219.0	3	274	1625.55	...	
28381	30301	1175	18	Male	0.0	student	1232.0	2	474	2107.05	...	

5 rows × 21 columns



Input	data.shape
Output	(28382, 21)

Input	data.columns
Output	Index(['customer_id', 'vintage', 'age', 'gender', 'dependents', 'occupation', 'city', 'customer_nw_category', 'branch_code', 'current_balance', 'previous_month_end_balance', 'average_monthly_balance_prevQ', 'average_monthly_balance_prevQ2', 'current_month_credit', 'previous_month_credit', 'current_month_debit', 'previous_month_debit', 'current_month_balance', 'previous_month_balance', 'churn', 'last_transaction'], dtype='object')

4. Studying the Variables concerned

Input	data.dtypes
Output	<pre>customer_id int64 vintage int64 age int64 gender object dependents float64 occupation object city float64 customer_nw_category int64 branch_code int64 current_balance float64 previous_month_end_balance float64 average_monthly_balance_prevQ float64 average_monthly_balance_prevQ2 float64 current_month_credit float64 previous_month_credit float64 current_month_debit float64 previous_month_debit float64 current_month_balance float64 previous_month_balance float64 churn int64 last_transaction object dtype: object</pre>

Input	data.dtypes[data.dtypes == "int64"]
Output	<pre>customer_id int64 vintage int64 age int64 customer_nw_category int64 branch_code int64 churn int64 dtype: object</pre>

Input	data.dtypes[data.dtypes == "object"]	
Output	gender	object
	occupation	object
	last_transaction	object
	dtype: object	

Input	data.dtypes[data.dtypes == "float64"]	
Output	dependents	float64
	city	float64
	current_balance	float64
	previous_month_end_balance	float64
	average_monthly_balance_prevQ	float64
	average_monthly_balance_prevQ2	float64
	current_month_credit	float64
	previous_month_credit	float64
	current_month_debit	float64
	previous_month_debit	float64
	current_month_balance	float64
	previous_month_balance	float64
	dtype: object	

5. Conversion of variables into suitable Data types

Input	data["customer_nw_category"] data["customer_nw_category"].astype("category") data["branch_code"] = data["branch_code"].astype("category") data["churn"] = data["churn"].astype("category") data["gender"] = data["gender"].astype("category") data["occupation"] = data["occupation"].astype("category") data["city"] = data["city"].astype("category") data["dependents"] = data["dependents"].astype("Int64") data.dtypes		=
Output	customer_id	int64	
	vintage	int64	
	age	int64	
	gender	category	
	dependents	Int64	
	occupation	category	
	city	category	
	customer_nw_category	category	
	branch_code	category	
	current_balance	float64	
	previous_month_end_balance	float64	
	average_monthly_balance_prevQ	float64	
	average monthly balance prevQ2	float64	
	current_month_credit	float64	
	previous_month_credit	float64	
	current_month_debit	float64	
	previous_month_debit	float64	
	current_month_balance	float64	
	previous_month_balance	float64	
	churn	category	
	last_transaction	object	
	dtype: object		

Input	<pre> date = pd.DatetimeIndex(data["last_transaction"]) data["doy_lt"] = date.dayofyear #Day of Year of Last Transaction data["woy_lt"] = date.weekofyear #Week of Year of Last Transaction data["moy_lt"] = date.month #Month of Year of Last Transaction data["dow_lt"] = date.dayofweek #Day of Week of Last Transaction data.head() </pre>
-------	--

Output

alance	...	current_month_debit	previous_month_debit	current_month_balance	previous_month_balance	churn	last_transaction	doy_lt	woy_lt	moy_lt	dow_lt
458.71	...	0.20	0.20	1458.71	1458.71	0	2019-05-21	141.0	21.0	5.0	1.0
390.37	...	5486.27	100.56	6496.78	8787.61	0	2019-11-01	305.0	44.0	11.0	4.0
913.16	...	6046.73	259.23	5006.28	5070.14	0	NaT	NaN	NaN	NaN	NaN
291.91	...	0.47	2143.33	2291.91	1669.79	1	2019-08-06	218.0	32.0	8.0	1.0
927.72	...	588.62	1538.06	1157.15	1677.16	1	2019-11-03	307.0	44.0	11.0	6.0

6. Deleting the Excess Columns

Input	<pre> data = data.drop(columns = ["last_transaction", "Day_of_Year_of_Last_Transaction", "Week_of_Year_of_Last_Transaction", "Month_of_Year_of_Last_Transaction", "Day_of_Week_of_Last_Transaction"]) data.head() data.dtypes </pre>	
Output	<pre> customer_id int64 vintage int64 age int64 gender category dependents Int64 occupation category city category customer_nw_category category branch_code category current_balance float64 previous_month_end_balance float64 average_monthly_balance_prevQ float64 average_monthly_balance_prevQ2 float64 current_month_credit float64 previous_month_credit float64 current_month_debit float64 previous_month_debit float64 current_month_balance float64 previous_month_balance float64 churn category last_transaction object doy_lt float64 woy_lt float64 moy_lt float64 dow_lt float64 dtype: object </pre>	

7. Univariate Analysis – Numerical values

Input	data.select_dtypes(include = ["int64", "Int64", "float64"]).dtypes	
Output	customer_id	int64
	vintage	int64
	age	int64
	dependents	Int64
	current_balance	float64
	previous_month_end_balance	float64
	average_monthly_balance_prevQ	float64
	average_monthly_balance_prevQ2	float64
	current_month_credit	float64
	previous_month_credit	float64
	current_month_debit	float64
	previous_month_debit	float64
	current_month_balance	float64
	previous_month_balance	float64
	doy_lt	float64
	woy_lt	float64
	moy_lt	float64
	dow_lt	float64
	dtype: object	

- **Grouping of Variables**

Input	customer_details=["customer_id", "vintage", "age"] current_month_details=["current_balance", "current_month_credit", "current_month_debit", "current_month_balance"] previous_month_details=["previous_month_end_balance", "previous_month_credit", "previous_month_debit", "previous_month_balance"] previous_quarter_details=["average_monthly_balance_prevQ", "average_monthly_balance_prevQ2"] transaction_date=["doy_lt", "woy_lt", "moy_lt", "dow_lt"]
-------	---

- **Defining function for Univariate Analysis**


Input	<pre>def UVA_numeric(data, var_group): size = len(var_group) plt.figure(figsize = (7*size,3), dpi = 100) for j,i in enumerate(var_group): mini = data[i].min() maxi = data[i].max() ran = data[i].max()-data[i].min() mean = data[i].mean() median = data[i].median() st_dev = data[i].std() skew = data[i].skew() kurt = data[i].kurtosis() points = mean-st_dev, mean+st_dev plt.subplot(1,size,j+1) sea.kdeplot(data[i], shade=True)</pre>
-------	--

	<pre> sea.lineplot(points, [0,0], color = 'black', label = "std_dev") sea.scatterplot([mini,maxi], [0,0], color = 'orange', label = "min/max") sea.scatterplot([mean], [0], color = 'red', label = "mean") sea.scatterplot([median], [0], color = 'blue', label = "median") plt.xlabel('{}'.format(i), fontsize = 20) plt.ylabel('density') plt.title('std_dev = {}; kurtosis = {}; \nskew = {}; range = {} \nmean = {}; median = {}'.format((round(points[0],2),round(points[1],2)), round(kurt,2), round(skew,2), (round(mini,2),round(maxi,2),round(ran,2))), round(mean,2), round(median,2))) </pre>
--	--

- Customer Details**

Input	UVA_numeric(data,customer_details)
-------	------------------------------------

Output

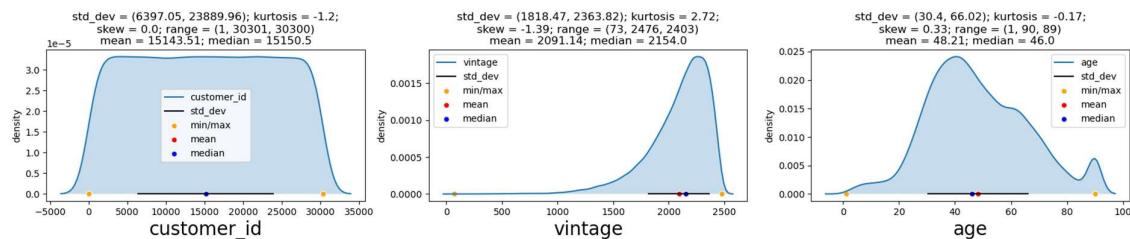

Customer ID: Customer ID is unique to all customers and hence has the uniform distribution Thus Customer ID as a variable can be dropped


Vintage: It is skewed as many customers joined between 1500 to 2500 days from the day of extraction It has a negative skew therefore variable is associated with the loyal customers Kurtosis is positive and thus outliers may be present

Age: Median age is around 40 Majority of the customers lie between the age of 30-60 It has a positive skew therefore variable is associated to the older customers more Kurtosis is negative and thus outliers to be present is extremely unlikely

- Current Month**

Input	UVA_numeric(data,current_month_details)
-------	---

Output

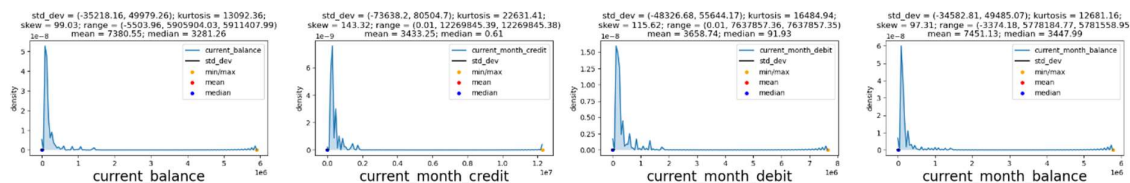


All the above plots have extreme skewness and thus many outliers are present.

- **Previous Month**

Input	UVA_numeric(data, previous_month_details)
-------	---

Output

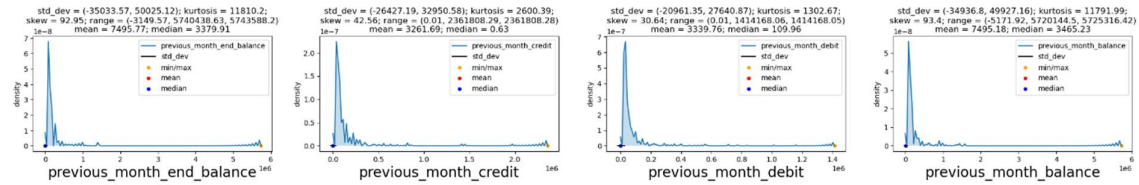


All the above plots have extreme skewness and thus many outliers are present.

- **Previous Quarters**

Input	UVA_numeric(data, previous_quarter_details)
-------	---

Output

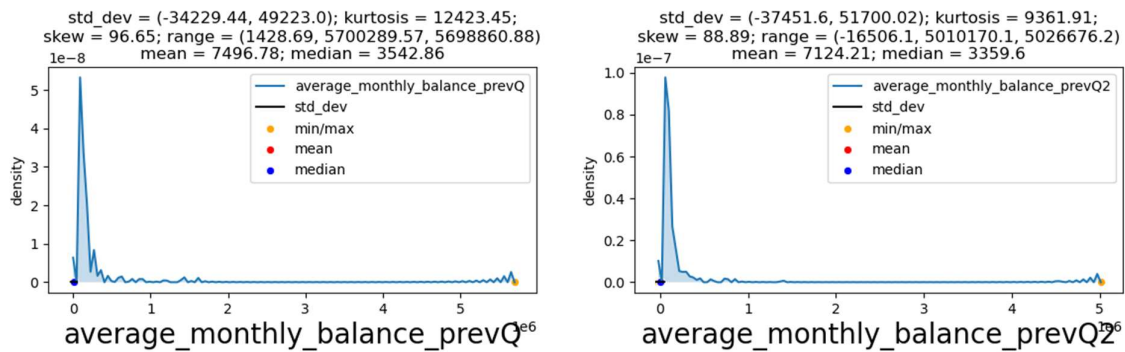


All the above plots have extreme skewness and thus many outliers are present.

- **Transaction Date**

Input	UVA_numeric(data, previous_quarter_details)
-------	---

Output

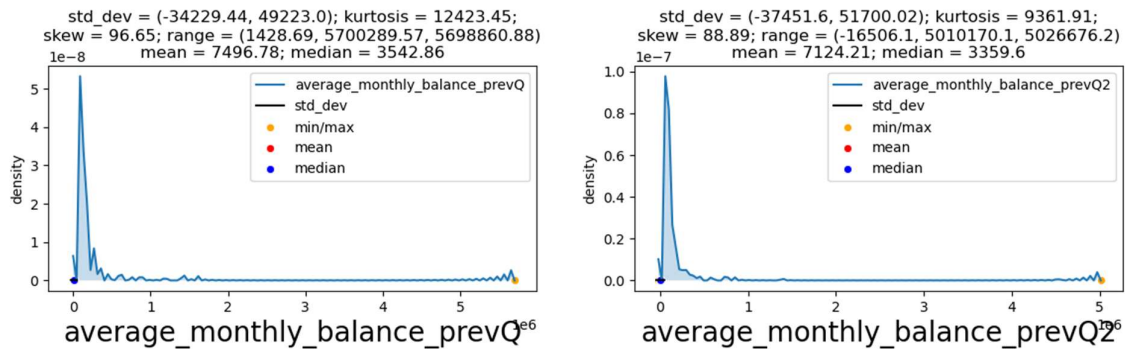


All the above plots have extreme skewness and thus many outliers are present.

- **Removing Outliers for Current month to visualise it**

Input	<pre>factor = 3 cm_data = data[current_month_details]</pre> <pre>cm_data = cm_data[cm_data['current_balance'] factor*cm_data['current_balance'].std()]</pre> <pre>cm_data = cm_data[cm_data['current_month_credit'] factor*cm_data['current_month_credit'].std()]</pre> <pre>cm_data = cm_data[cm_data['current_month_debit'] factor*cm_data['current_month_debit'].std()]</pre> <pre>cm_data = cm_data[cm_data['current_month_balance'] factor*cm_data['current_month_balance'].std()]</pre> <pre>len(data), len(cm_data)</pre>	
Output	(28382, 27113)	

Input	UVA_numeric(data, current_month_details)
Output	

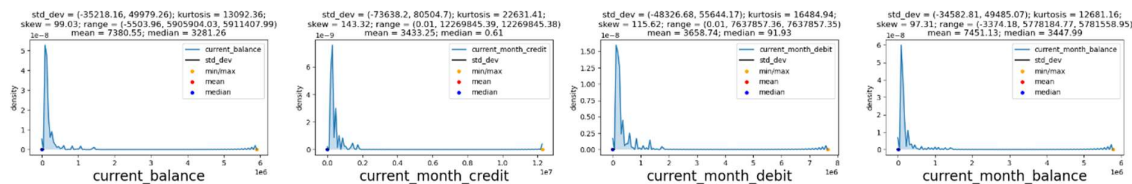

Even after removal of outliers the skewness is still present. This can hint multiple possibilities such as another relation between them or there might be some customers making high amounts of transactions every month, etc.


8. Univariate Analysis – Categorical Variables

Input	data.select_dtypes(exclude = ["int64", "Int64", "float64"]).dtypes	
Output	gender	category
	occupation	category
	city	category
	customer_nw_category	category
	branch_code	category
	churn	category
	last_transaction	object
	dtype: object	

Input	<pre> def UVA_category(data, var_group): size = len(var_group) plt.figure(figsize = (7*size,5), dpi = 100) for j,i in enumerate(var_group): norm_count = data[i].value_counts(normalize = True) n_uni = data[i].nunique() plt.subplot(1,size,j+1) sea.barplot(norm_count, norm_count.index , order = norm_count.index) plt.xlabel('fraction/percent', fontsize = 20) plt.ylabel('{} '.format(i), fontsize = 20) plt.title('n_uniques = {} \n value counts \n {}'.format(n_uni,norm_count)) </pre>
-------	---

- **Customer Information**

Input	UVA_category(data, ['occupation', 'gender', 'customer_nw_category'])
Output	

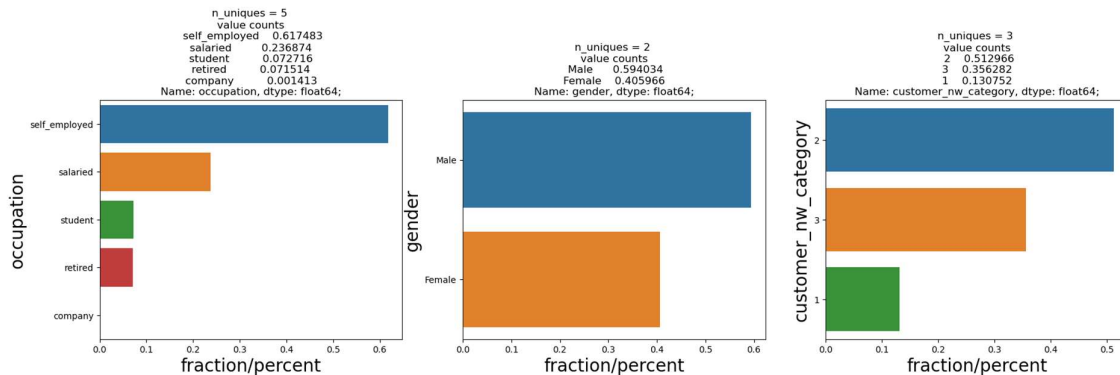

We can see that:

Occupation: Majority of the customers are self employed There is little to no company accounts


Gender: Males hold more number of accounts than females

Customer Net Worth: Majority of the customers fall under the 2nd category Median number in category 3 Low number in category 1

- Account Information


Input	UVA_category(data, ['city', 'branch_code'])
-------	---

Output

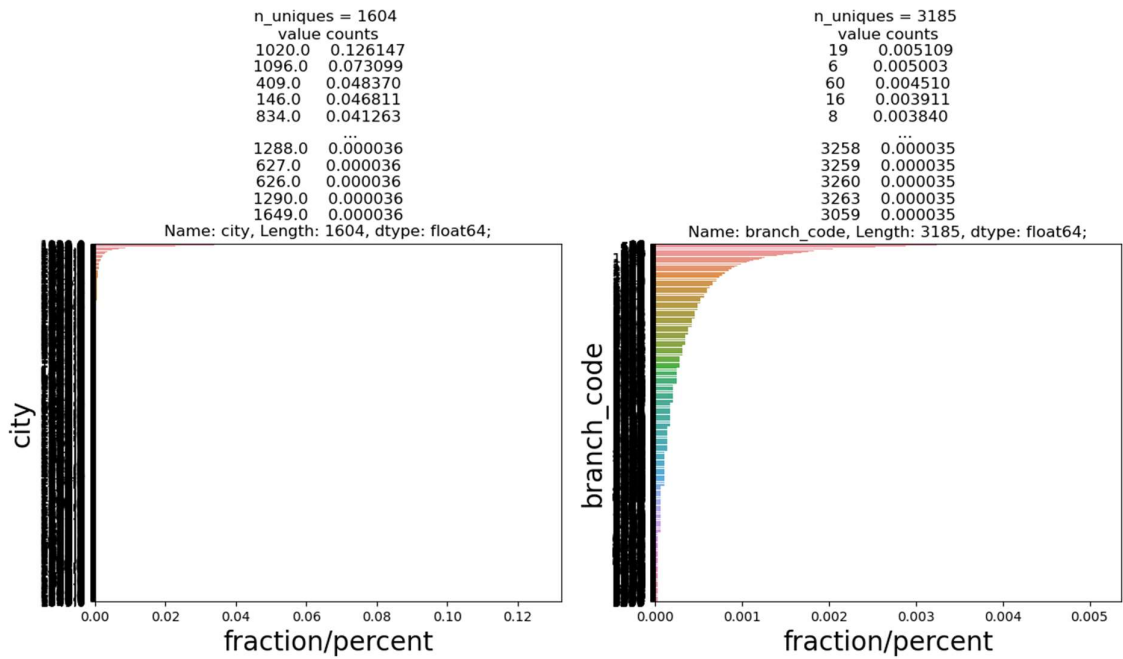


Input	<pre>#Plotting "city" plt.figure(figsize = (5,5), dpi = 120) city_count = data['city'].value_counts(normalize=True) sea.barplot(city_count.index, city_count , order = city_count.index) plt.xlabel('City') plt.ylabel('fraction/percent') plt.ylim(0,0.02)</pre>
-------	---

Output

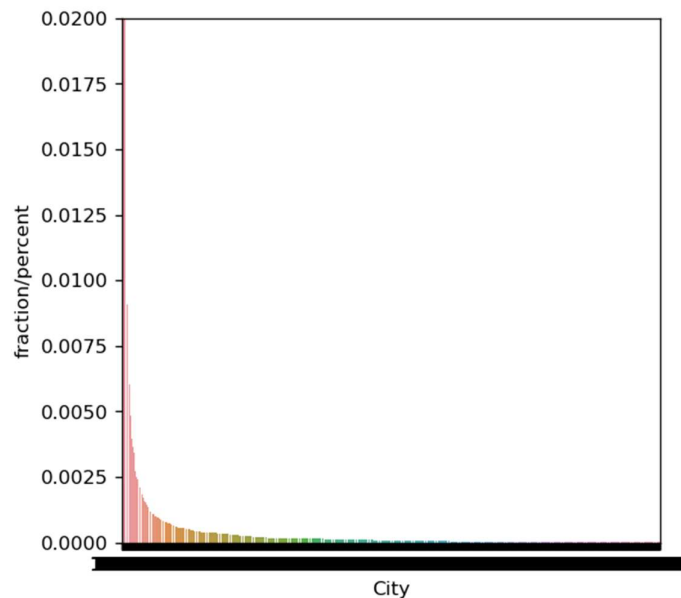

Input	<pre>#Plotting "branch_code" plt.figure(figsize = (5,5), dpi = 120) branch_count = data["branch_code"].value_counts() sea.barplot(branch_count.index, branch_count , order = branch_count.index) plt.xlabel('branch_code') plt.ylabel('fraction/percent') #plt.ylim(0,0.02)</pre>
-------	---

Output

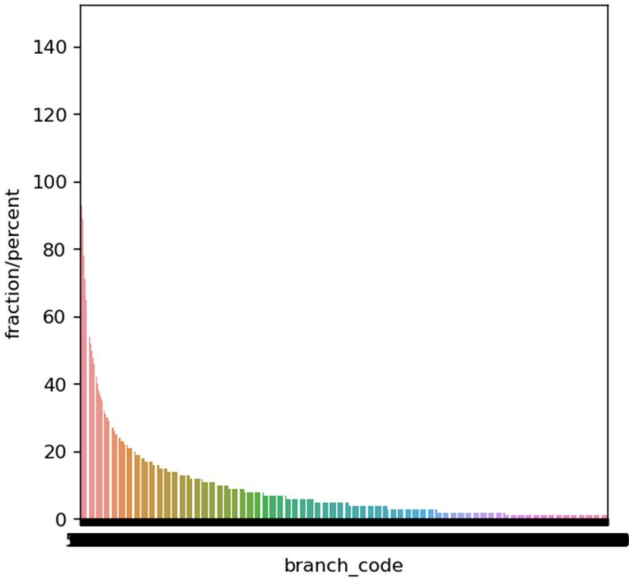


Popular cities and branch code might be able to explain the skewness and outliers of credit/debit variables. Possibility that cities and branch code with very few accounts may lead to churning

- Churn

Input	<pre>UVA_category(data, ['churn'])</pre>
-------	--

Output

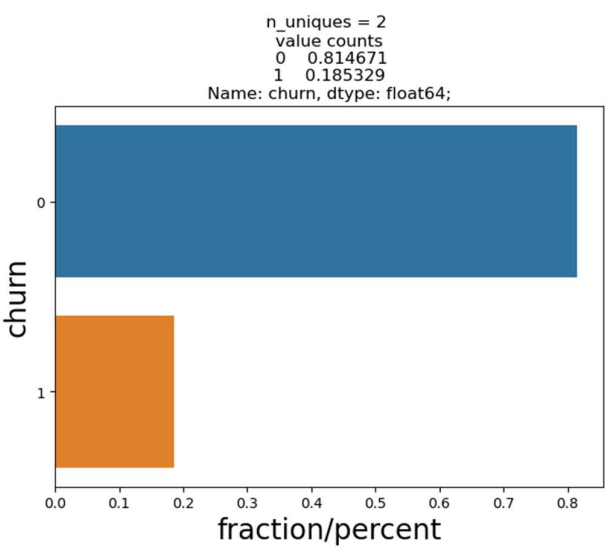

Clearly seen that only 1/4th of the total customers churn

9. Univariate Analysis for Missing Values

Input	data.isnull().sum()	
Output	customer_id	0
	vintage	0
	age	0
	gender	525
	dependents	2463
	occupation	80
	city	803
	customer_nw_category	0
	branch_code	0
	current_balance	0
	previous_month_end_balance	0
	average_monthly_balance_prevQ	0
	average_monthly_balance_prevQ2	0
	current_month_credit	0
	previous_month_credit	0
	current_month_debit	0
	previous_month_debit	0
	current_month_balance	0
	previous_month_balance	0
	churn	0
	last_transaction	0
	doy_lt	3223
	woy_lt	3223
	moy_lt	3223
	dow_lt	3223
	dtype: int64	

Things to investigate further down:


- Gender: Do the customers with missing gender values have some common behaviour in-
 - churn: do missing values have any relation with churn?
- Dependents:
 - Missing values might be similar to zero dependents
 - churn: do missing values have any relation with churn?
- Occupation:
 - Do missing values have similar behaviour to any other occupation
 - do they have some relation with churn?
- city:
 - the respective cities can be found using branch_code
- last_transaction:
 - checking their previous month and current month and previous_quarter activity might give insight on their last transaction.
- For almost all the above:
 - vintage: might be recording errors from same period of joining
 - branch_code: might be recording error from certain branch

10. Univariate Analysis for Outliers


Input	UVA_category(data, ['churn'])
Output	<pre> def UVA_outlier(data, var_group, include_outlier = True): size = len(var_group) plt.figure(figsize = (7*size,4), dpi = 100) for j,i in enumerate(var_group): quant25 = data[i].quantile(0.25) quant75 = data[i].quantile(0.75) IQR = quant75 - quant25 med = data[i].median() whis_low = quant25-(1.5*IQR) whis_high = quant75+(1.5*IQR) outlier_high = len(data[i][data[i]>whis_high]) outlier_low = len(data[i][data[i]<whis_low]) if include_outlier == True: plt.subplot(1,size,j+1) sea.boxplot(data[i], orient="v") plt.ylabel('{}'.format(i)) plt.title('With Outliers\nIQR = {}; Median = {} \n 2nd,3rd quartile = {};\n Outlier (low/high) = {} \n'.format(round(IQR,2), round(med,2), (round(quant25,2),round(quant75,2)), (outlier_low,outlier_high))) else: data2 = data[var_group][:] data2[i][data2[i]>whis_high] = whis_high+1 data2[i][data2[i]<whis_low] = whis_low-1 plt.subplot(1,size,j+1) sea.boxplot(data2[i], orient="v") plt.ylabel('{}'.format(i)) plt.title('Without Outliers\nIQR = {}; Median = {} \n 2nd,3rd quartile = {};\n Outlier (low/high) = {} \n'.format(round(IQR,2), round(med,2), (round(quant25,2),round(quant75,2)), (outlier_low,outlier_high))) </pre>

- **Current Month**

Input	UVA_outlier(data, current_month_details,)
Output	

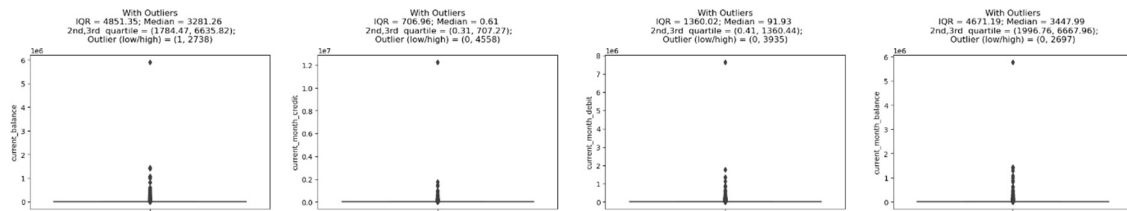


Input	UVA_outlier(data, current_month_details, include_outlier=False)
Output	

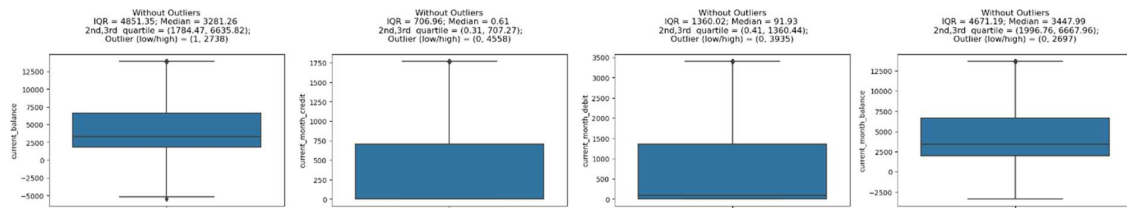


- **Previous Month**

Input	UVA_outlier(data, previous_month_details)
Output	

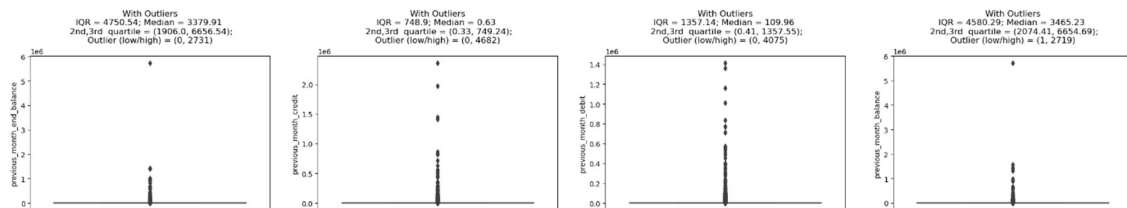


Input	UVA_outlier(data, previous_month_details, include_outlier=False)
Output	

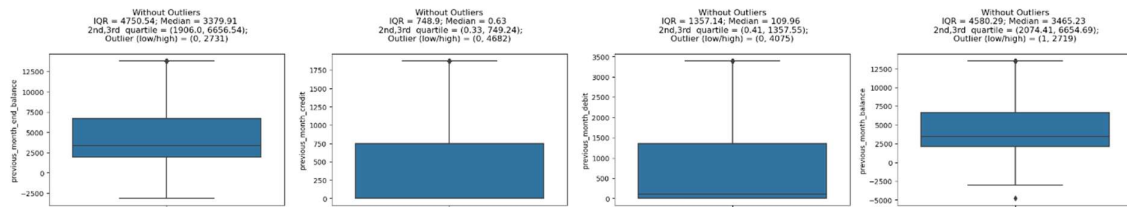

- Previous Quarters


Input	UVA_outlier(data,previous_quarter_details)
-------	--

Output

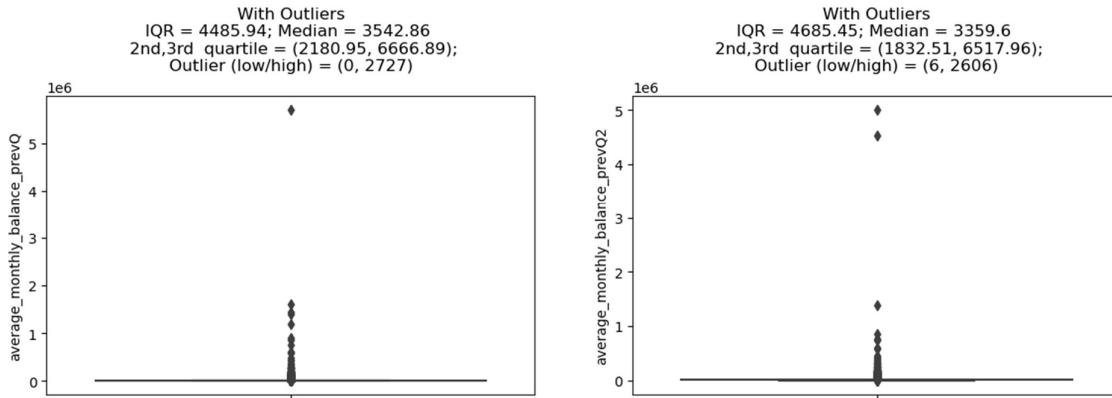

Input	UVA_outlier(data,previous_quarter_details,include_outlier=False)
-------	--

Output

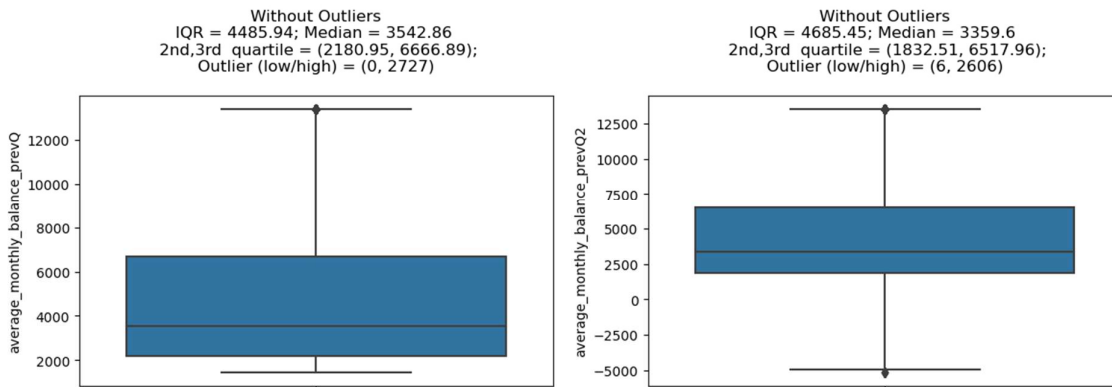

Investigation directions from Univariate Analysis

1. customer_id variable can be dropped.
2. Is there any common trait/relation between the customers who are performing high transaction credit/debits? *.customer_nw_category might explain that. .Occupation = Company might explain them . *popular cities might explain this*
3. Customers whose last transaction was 6 months ago, did all of them churn? *. *Possibility that cities and branch code with very few accounts may lead to churning.*

11. Bivariate Analysis: Numerical-Numerical

Input	numerical = data.select_dtypes(include = ["int64", "Int64", "float64"]) numerical.dtypes	
Output	customer_id	int64
	vintage	int64
	age	int64
	dependents	Int64
	current_balance	float64
	previous_month_end_balance	float64
	average_monthly_balance_prevQ	float64
	average_monthly_balance_prevQ2	float64
	current_month_credit	float64
	previous_month_credit	float64
	current_month_debit	float64
	previous_month_debit	float64
	current_month_balance	float64
	previous_month_balance	float64
	doy_lt	float64
	woy_lt	float64
	moy_lt	float64
	dow_lt	float64
	dtype: object	

12. Corelation Matrix

Input	correlation = numerical.dropna().corr() correlation
-------	--


Output

	customer_id	vintage	age	dependents	current_balance	previous_month_end_balance	average_monthly_balance_prevQ
customer_id	1.000000	-0.011288	0.001397	-0.009737	0.014989	0.012414	0.011372
vintage	-0.011288	1.000000	0.003170	0.005109	-0.007223	-0.008001	-0.010855
age	0.001397	0.003170	1.000000	-0.003809	0.058925	0.062775	0.070902
dependents	-0.009737	0.005109	-0.003809	1.000000	-0.004554	-0.000826	0.000121
current_balance	0.014989	-0.007223	0.058925	-0.004554	1.000000	0.809257	0.857204
previous_month_end_balance	0.012414	-0.008001	0.062775	-0.000826	0.809257	1.000000	0.908053
average_monthly_balance_prevQ	0.011372	-0.010855	0.070903	0.000121	0.857204	0.908053	1.000000
average_monthly_balance_prevQ2	0.008060	-0.003824	0.081361	0.002584	0.584156	0.661439	0.731952
current_month_credit	0.004223	-0.004821	0.023921	0.002188	0.053329	0.051080	0.051292
previous_month_credit	-0.004819	-0.000410	0.027678	0.022772	0.101495	0.195149	0.138965
current_month_debit	0.004870	-0.004899	0.025366	0.006784	0.075149	0.100379	0.091492
previous_month_debit	-0.005906	-0.007777	0.027717	0.029073	0.151771	0.192376	0.187222
current_month_balance	0.012085	-0.008703	0.063120	-0.001859	0.940234	0.910206	0.920942
previous_month_balance	0.011025	-0.010439	0.067712	0.000241	0.812295	0.912269	0.983792
doy_lt	-0.006114	-0.000680	0.010754	0.079740	0.035242	0.024130	0.021102
woy_lt	0.011344	-0.010040	0.000501	0.034460	-0.008980	0.000946	-0.000572
moy_lt	-0.005374	-0.001359	0.011970	0.077978	0.033127	0.023485	0.020942
dow_lt	0.009665	-0.009683	-0.020895	-0.001702	-0.000315	0.002033	0.000642

- Heatmap for better visualization

Input	<pre>plt.figure(figsize=(36,6), dpi=140) for j,i in enumerate(['pearson','kendall','spearman']): plt.subplot(1,3,j+1) correlation = numerical.dropna().corr(method=i) sea.heatmap(correlation, linewidth = 2) plt.title(i, fontsize=18)</pre>
-------	---

Output

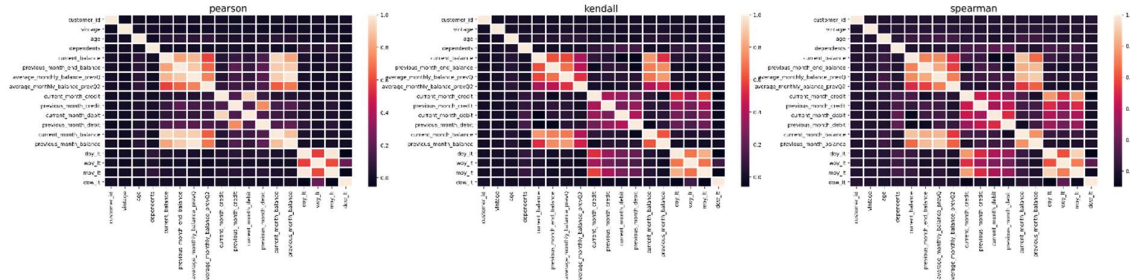

1. Kendall and Spearman correlation seem to have very similar pattern between them, except the slight variation in magnitude of correlation.
2. Too many variables with insignificant correlation.
3. Major correlation lies between the transaction variables and balance variables.


Compiling all the data gathered until now....

Input	<pre>var = [] var.extend(previous_month_details) var.extend(current_month_details) var.extend(previous_quarter_details)</pre>
-------	---

Plotting a heatmap with the above included

Input	<pre>plt.figure(figsize=(36,6), dpi=140) for j,i in enumerate(['pearson','kendall','spearman']): plt.subplot(1,3,j+1) correlation = numerical[var].dropna().corr(method=i) sea.heatmap(correlation, linewidth = 2) plt.title(i, fontsize=18)</pre>
-------	--

Output

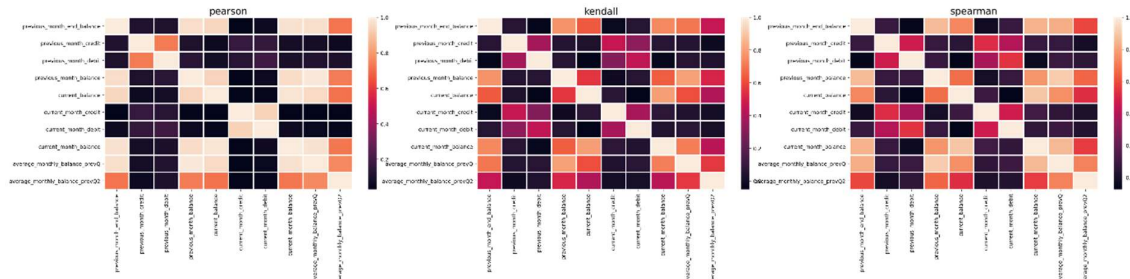


1. Transaction variables like credit/debit have a strong correlation among themselves.
2. Balance variables have strong correlation among themselves.
3. Transaction variables like credit/debit have insignificant or no correlation with the Balance variables.

13. Plotting the Inferences

Input	transactions	=
	['current_month_credit','current_month_debit','previous_month_credit','previous_month_debit']	
	balance	=
	['previous_month_end_balance','previous_month_balance','current_balance','current_month_balance']	
	plt.figure(dpi=140)	
	sea.pairplot(numerical[transactions])	


Output

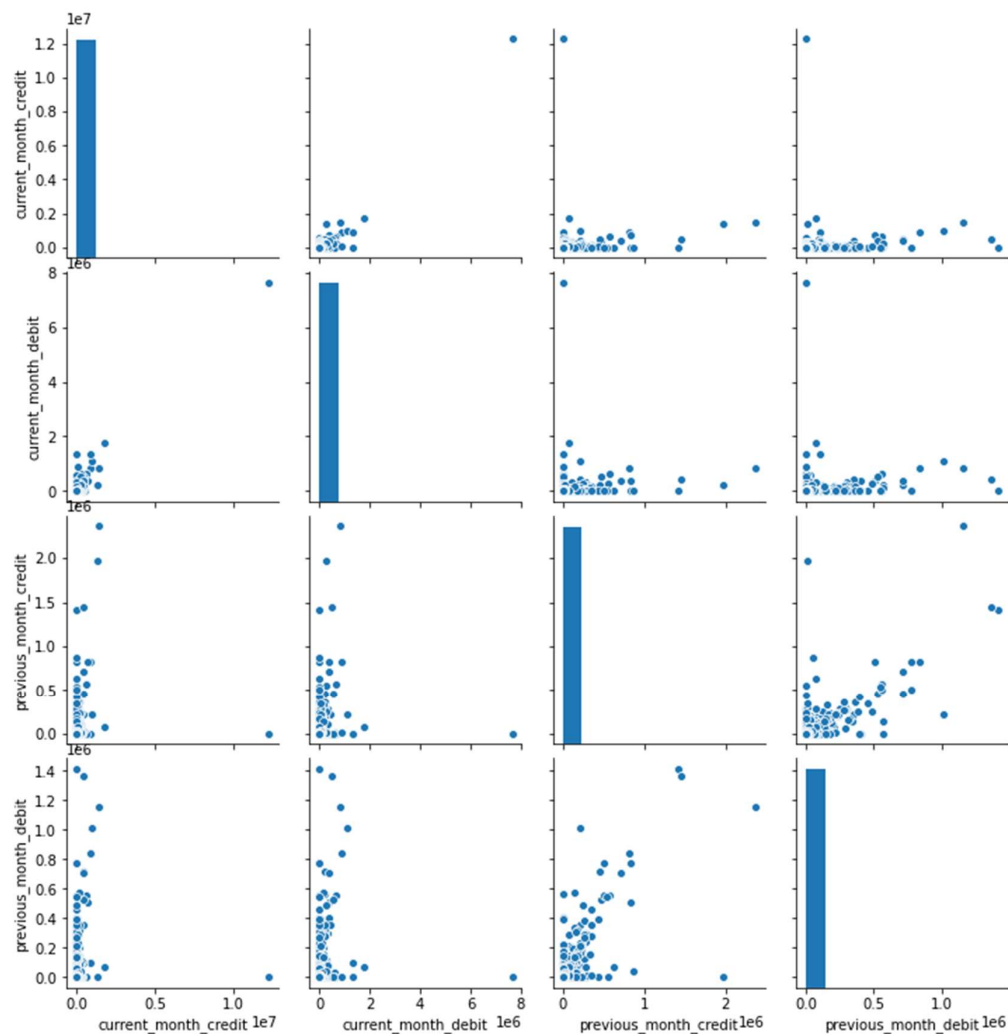

Outliers are present affecting our judgement of the graphs and hence using the log function to negate the effect of the outliers.

Input	<pre> for column in var: mini=1 if numerical[column].min()<0: mini = abs(numerical[column].min()) + 1 numerical[column] = [i+mini for i in numerical[column]] numerical[column] = numerical[column].map(lambda x : np.log(x)) plt.figure(dpi=140) sea.pairplot(numerical[transactions]) </pre>
-------	---


Output

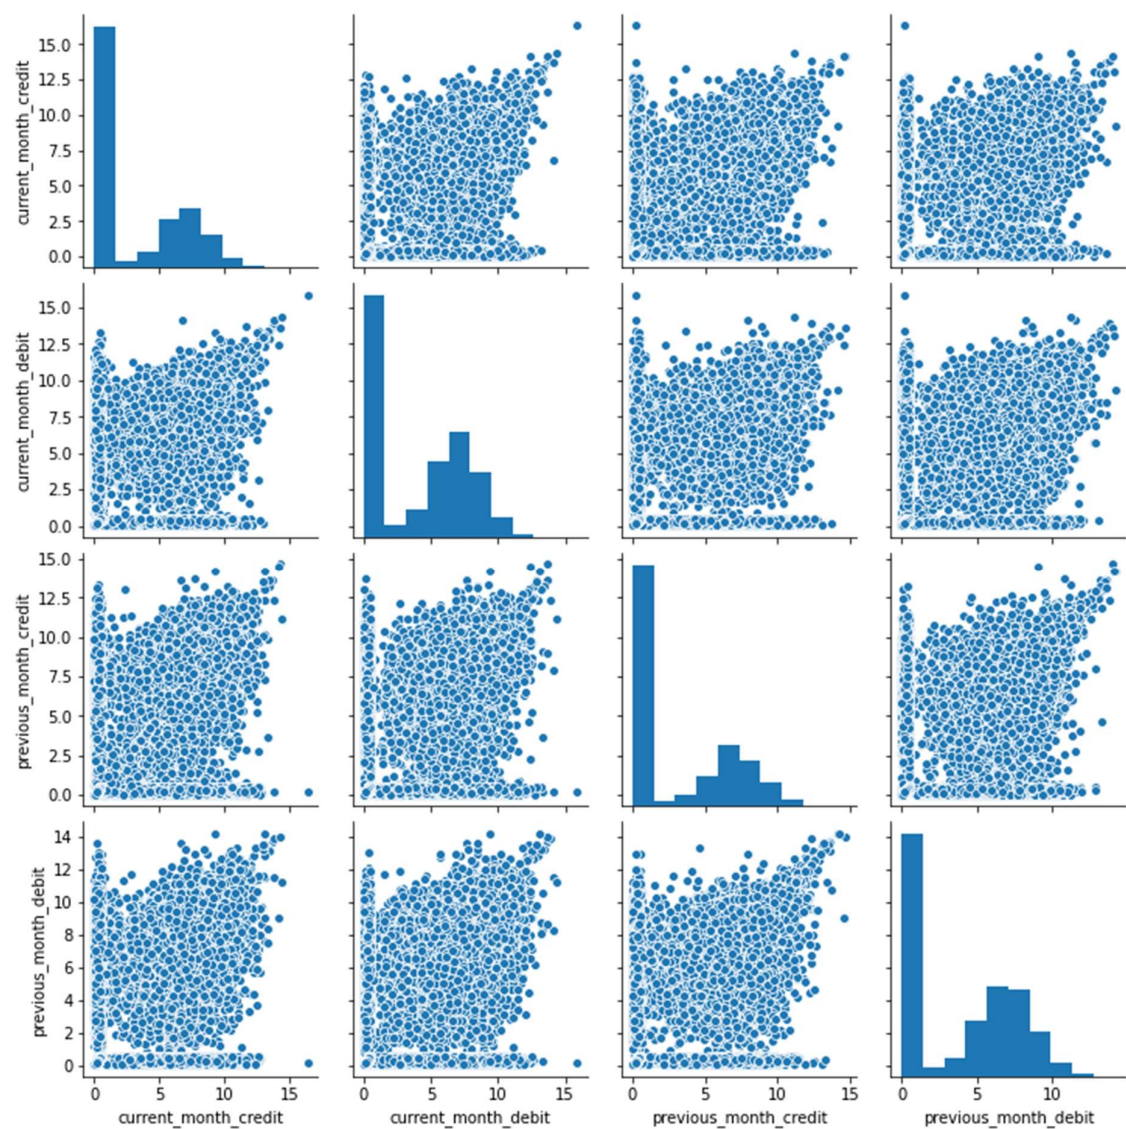

1. This validates the high correlation between the transaction variables.
2. This high correlation can be used for feature engineering during the later stages.

Input	<pre>plt.figure(dpi=140) sea.pairplot(numerical[balance])</pre>
-------	---


Output

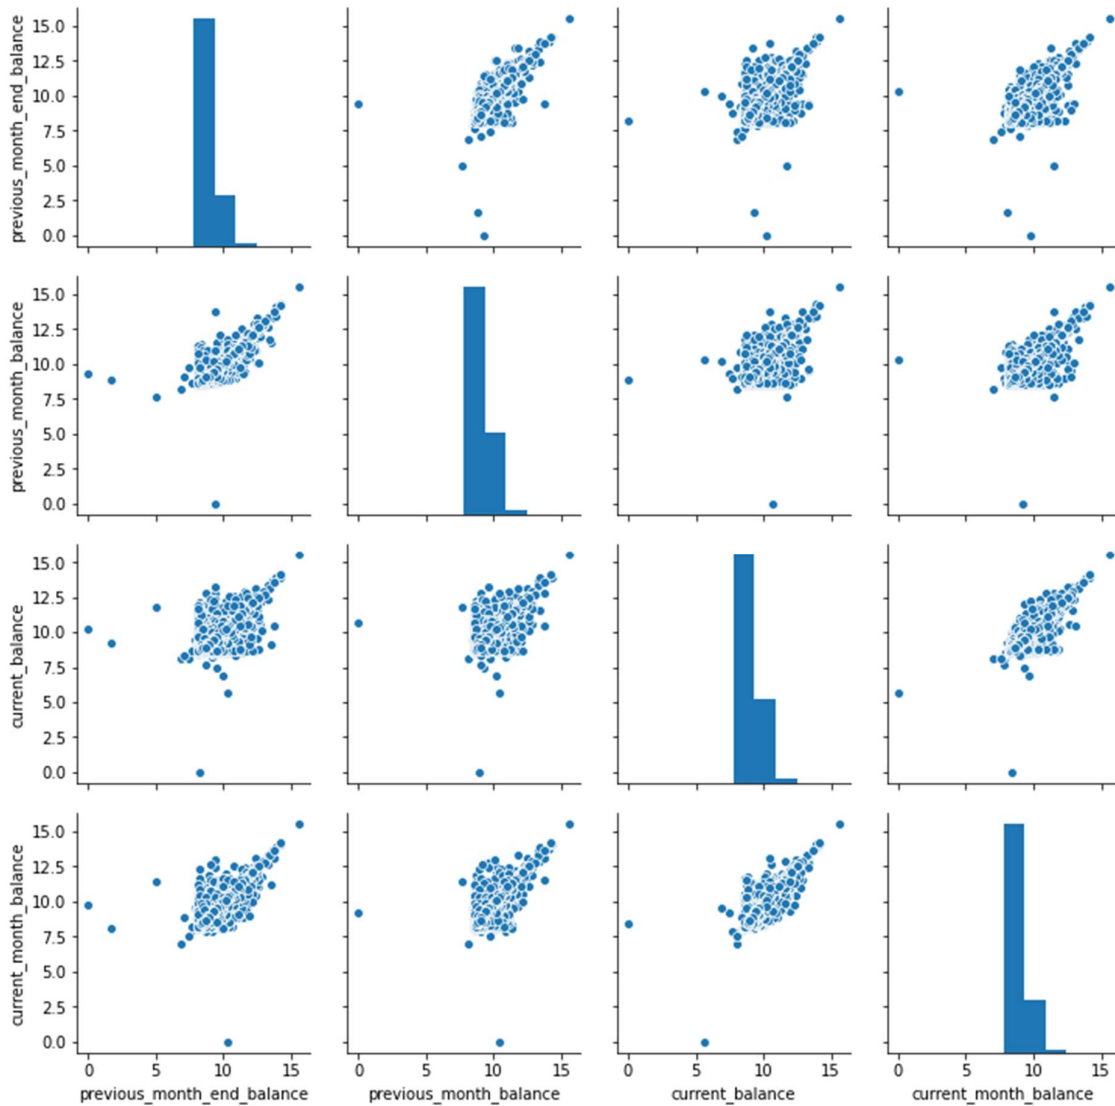

1. This validates the high correlation between the balance variables.
2. This high correlation can be used for feature engineering during the later stages.

Input	<pre>plt.figure(dpi=140) sea.scatterplot(numerical['average_monthly_balance_prevQ'], numerical['average_monthly_balance_prevQ2'])</pre>
-------	---

Output

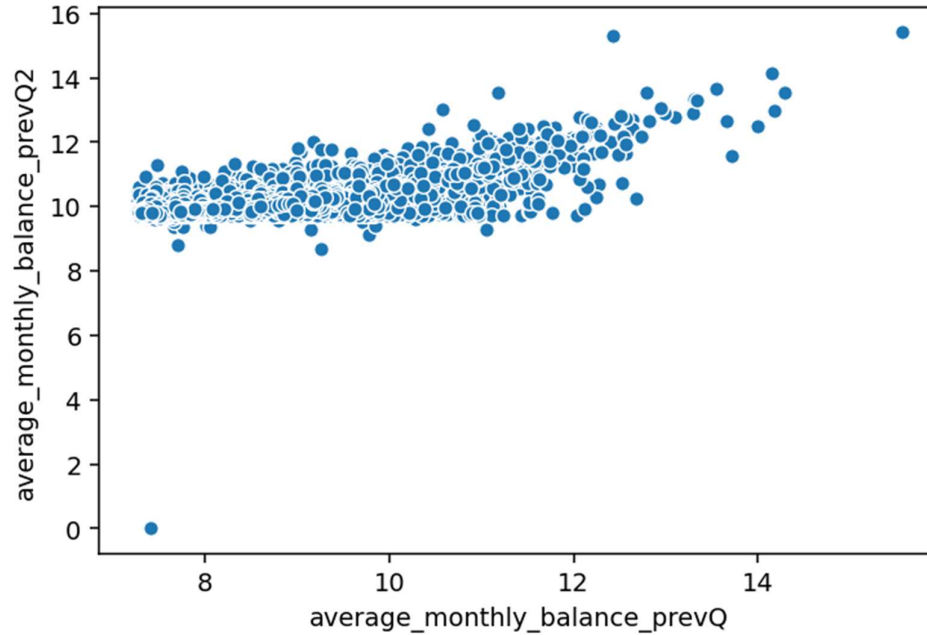

1. This validates the high correlation between the two previous quarters
2. This high correlation can be used for feature engineering during the later stages.

14. Multivariate Analysis

- **Pivot Table – Gender, Occupation, & Customer Net worth category against Churn**

Input	data.dtypes	
Output	customer_id	int64
	vintage	int64
	age	int64
	gender	category
	dependents	Int64
	occupation	category
	city	category
	customer_nw_category	category
	branch_code	category
	current_balance	float64
	previous_month_end_balance	float64
	average_monthly_balance_prevQ	float64
	average_monthly_balance_prevQ2	float64
	current_month_credit	float64
	previous_month_credit	float64
	current_month_debit	float64
	previous_month_debit	float64
	current_month_balance	float64
	previous_month_balance	float64
	churn	category
	last_transaction	object
	doy_lt	float64
	woy_lt	float64

	moy_lt dow_lt dtype: object	float64 float64																																																				
Input	data["gender"] = data["gender"].astype("object") data["occupation"] = data["occupation"].astype("object") data["customer_nw_category"] = data["customer_nw_category"].astype("object") data["churn"] = data["churn"].astype("int") data["city"] = data["city"].astype("float") data["branch_code"] = data["branch_code"].astype("float") data.pivot_table("churn", ["gender", "occupation"], "customer_nw_category", aggfunc = "mean")*100																																																					
Output	<table><tr><th colspan="2">customer_nw_category</th><th>1</th><th>2</th><th>3</th></tr><tr><th>gender</th><th>occupation</th><th></th><th></th><th></th></tr><tr><td rowspan="5">Female</td><td>company</td><td>100.000000</td><td>0.000000</td><td>66.666667</td></tr><tr><td>retired</td><td>20.689655</td><td>11.219512</td><td>13.492063</td></tr><tr><td>salaried</td><td>18.545455</td><td>14.849188</td><td>17.689016</td></tr><tr><td>self_employed</td><td>18.111588</td><td>18.197035</td><td>18.920916</td></tr><tr><td>student</td><td>10.404624</td><td>14.442413</td><td>15.034965</td></tr><tr><td rowspan="5">Male</td><td>company</td><td>0.000000</td><td>0.000000</td><td>0.000000</td></tr><tr><td>retired</td><td>18.497110</td><td>14.251781</td><td>16.316640</td></tr><tr><td>salaried</td><td>17.557252</td><td>16.410469</td><td>18.468702</td></tr><tr><td>self_employed</td><td>22.832370</td><td>20.424978</td><td>21.465808</td></tr><tr><td>student</td><td>16.969697</td><td>17.210145</td><td>18.208955</td></tr></table>		customer_nw_category		1	2	3	gender	occupation				Female	company	100.000000	0.000000	66.666667	retired	20.689655	11.219512	13.492063	salaried	18.545455	14.849188	17.689016	self_employed	18.111588	18.197035	18.920916	student	10.404624	14.442413	15.034965	Male	company	0.000000	0.000000	0.000000	retired	18.497110	14.251781	16.316640	salaried	17.557252	16.410469	18.468702	self_employed	22.832370	20.424978	21.465808	student	16.969697	17.210145	18.208955
customer_nw_category		1	2	3																																																		
gender	occupation																																																					
Female	company	100.000000	0.000000	66.666667																																																		
	retired	20.689655	11.219512	13.492063																																																		
	salaried	18.545455	14.849188	17.689016																																																		
	self_employed	18.111588	18.197035	18.920916																																																		
	student	10.404624	14.442413	15.034965																																																		
Male	company	0.000000	0.000000	0.000000																																																		
	retired	18.497110	14.251781	16.316640																																																		
	salaried	17.557252	16.410469	18.468702																																																		
	self_employed	22.832370	20.424978	21.465808																																																		
	student	16.969697	17.210145	18.208955																																																		

1. Highest number of churning customers are those Male Customers who lie in 2 net worth category and belong to Self employed profession
2. Proportion wise for net worth category 1, Approximately 22% Male customers who belong to the Self-employed profession are churning
3. Proportion wise for net worth category 2, 20% Male customers who belong to the Self-employed profession are churning
4. For net worth category 3, Approximately 21% Male customers who belong to the Self-employed profession are churning
5. In all the cases of Customer net worth category, Self-employed Male customers are more likely to churn

- **Pivot Table – Gender, Age & Occupation against Churn**

Input	age = pd.cut(data['age'], [0, 25, 50, 100]) data.pivot_table('churn', ['gender', age], 'occupation', aggfunc='mean')*100																																																																		
Output	<table> <tr> <th colspan="2"></th><th>occupation</th><th>company</th><th>retired</th><th>salaried</th><th>self_employed</th><th>student</th></tr> <tr> <th>gender</th><th>age</th><th colspan="5"></th><th></th></tr> <tr> <td rowspan="3">Female</td><td>(0, 25]</td><td>NaN</td><td>NaN</td><td>15.909091</td><td>21.774194</td><td>13.421053</td><td></td></tr> <tr> <td>(25, 50]</td><td>50.0</td><td>0.000000</td><td>16.096866</td><td>19.163293</td><td>15.510204</td><td></td></tr> <tr> <td>(50, 100]</td><td>50.0</td><td>13.541667</td><td>17.948718</td><td>17.370083</td><td>0.000000</td><td></td></tr> <tr> <td rowspan="3">Male</td><td>(0, 25]</td><td>0.0</td><td>NaN</td><td>20.987654</td><td>30.327869</td><td>16.545894</td><td></td></tr> <tr> <td>(25, 50]</td><td>0.0</td><td>14.285714</td><td>17.349769</td><td>21.886121</td><td>21.076233</td><td></td></tr> <tr> <td>(50, 100]</td><td>0.0</td><td>15.493827</td><td>17.165150</td><td>19.340538</td><td>0.000000</td><td></td></tr> </table>									occupation	company	retired	salaried	self_employed	student	gender	age							Female	(0, 25]	NaN	NaN	15.909091	21.774194	13.421053		(25, 50]	50.0	0.000000	16.096866	19.163293	15.510204		(50, 100]	50.0	13.541667	17.948718	17.370083	0.000000		Male	(0, 25]	0.0	NaN	20.987654	30.327869	16.545894		(25, 50]	0.0	14.285714	17.349769	21.886121	21.076233		(50, 100]	0.0	15.493827	17.165150	19.340538	0.000000	
		occupation	company	retired	salaried	self_employed	student																																																												
gender	age																																																																		
Female	(0, 25]	NaN	NaN	15.909091	21.774194	13.421053																																																													
	(25, 50]	50.0	0.000000	16.096866	19.163293	15.510204																																																													
	(50, 100]	50.0	13.541667	17.948718	17.370083	0.000000																																																													
Male	(0, 25]	0.0	NaN	20.987654	30.327869	16.545894																																																													
	(25, 50]	0.0	14.285714	17.349769	21.886121	21.076233																																																													
	(50, 100]	0.0	15.493827	17.165150	19.340538	0.000000																																																													

1. We have created three bins for the age variable dividing age into 3 groups 0-25, 25-50 and 50-100
2. Highest number of Customers are churning from Male category who belong to the age group of (25,50) and are professionally self employed
3. Highest Proportion of Customers are churning from Male category who belong to the age group of (0,25) and are professionally self employed
4. Here also Self Employed Male customers are churning more than any other combination of categories

- **Pivot Table – Gender, Age, Occupation and Current Balance against Churn**


Input	balance = pd.qcut(data['current_balance'], 3) data.pivot_table('churn', ['gender', age], [balance, 'occupation'], aggfunc='mean')*100																																																																																																																																																	
Output	<table><tr><th colspan="2"></th><th colspan="5">current_balance (-5503.961, 2202.177]</th><th colspan="5">(2202.177, 5114.317]</th><th colspan="5">(5114.317, 5905.505]</th></tr><tr><th colspan="2"></th><th>occupation</th><th>company</th><th>retired</th><th>salaried</th><th>self_employed</th><th>student</th><th>company</th><th>retired</th><th>salaried</th><th>self_employed</th><th>student</th><th>company</th><th>retired</th></tr><tr><th>gender</th><th>age</th><th colspan="12"></th></tr><tr><td rowspan="3">Female</td><td>(0, 25]</td><td>NaN</td><td>NaN</td><td>26.315789</td><td>38.596491</td><td>21.262458</td><td>NaN</td><td>NaN</td><td>5.882353</td><td>10.810811</td><td>7.167235</td><td>NaN</td><td></td><td></td></tr><tr><td>(25, 50]</td><td>50.0</td><td>0.000000</td><td>32.300885</td><td>33.677419</td><td>25.974026</td><td>100.0</td><td>0.000000</td><td>9.826590</td><td>10.891720</td><td>6.862745</td><td>0.0</td><td></td><td></td></tr><tr><td>(50, 100]</td><td>100.0</td><td>28.333333</td><td>35.156250</td><td>30.642361</td><td>0.000000</td><td>NaN</td><td>5.633803</td><td>11.200000</td><td>11.052166</td><td>NaN</td><td>0.0</td><td>8.11</td><td></td></tr><tr><td rowspan="3">Male</td><td>(0, 25]</td><td>0.0</td><td>NaN</td><td>35.294118</td><td>52.000000</td><td>28.189911</td><td>NaN</td><td>NaN</td><td>14.285714</td><td>14.117647</td><td>6.493506</td><td>NaN</td><td></td><td></td></tr><tr><td>(25, 50]</td><td>0.0</td><td>0.000000</td><td>33.367243</td><td>38.901345</td><td>44.117647</td><td>0.0</td><td>16.666667</td><td>11.889401</td><td>13.214740</td><td>12.345679</td><td>0.0</td><td>20.01</td><td></td></tr><tr><td>(50, 100]</td><td>0.0</td><td>29.489603</td><td>32.119914</td><td>33.060854</td><td>NaN</td><td>0.0</td><td>6.927176</td><td>10.766046</td><td>12.565905</td><td>NaN</td><td>0.0</td><td>10.61</td><td></td></tr></table>																current_balance (-5503.961, 2202.177]					(2202.177, 5114.317]					(5114.317, 5905.505]							occupation	company	retired	salaried	self_employed	student	company	retired	salaried	self_employed	student	company	retired	gender	age													Female	(0, 25]	NaN	NaN	26.315789	38.596491	21.262458	NaN	NaN	5.882353	10.810811	7.167235	NaN			(25, 50]	50.0	0.000000	32.300885	33.677419	25.974026	100.0	0.000000	9.826590	10.891720	6.862745	0.0			(50, 100]	100.0	28.333333	35.156250	30.642361	0.000000	NaN	5.633803	11.200000	11.052166	NaN	0.0	8.11		Male	(0, 25]	0.0	NaN	35.294118	52.000000	28.189911	NaN	NaN	14.285714	14.117647	6.493506	NaN			(25, 50]	0.0	0.000000	33.367243	38.901345	44.117647	0.0	16.666667	11.889401	13.214740	12.345679	0.0	20.01		(50, 100]	0.0	29.489603	32.119914	33.060854	NaN	0.0	6.927176	10.766046	12.565905	NaN	0.0	10.61	
		current_balance (-5503.961, 2202.177]					(2202.177, 5114.317]					(5114.317, 5905.505]																																																																																																																																						
		occupation	company	retired	salaried	self_employed	student	company	retired	salaried	self_employed	student	company	retired																																																																																																																																				
gender	age																																																																																																																																																	
Female	(0, 25]	NaN	NaN	26.315789	38.596491	21.262458	NaN	NaN	5.882353	10.810811	7.167235	NaN																																																																																																																																						
	(25, 50]	50.0	0.000000	32.300885	33.677419	25.974026	100.0	0.000000	9.826590	10.891720	6.862745	0.0																																																																																																																																						
	(50, 100]	100.0	28.333333	35.156250	30.642361	0.000000	NaN	5.633803	11.200000	11.052166	NaN	0.0	8.11																																																																																																																																					
Male	(0, 25]	0.0	NaN	35.294118	52.000000	28.189911	NaN	NaN	14.285714	14.117647	6.493506	NaN																																																																																																																																						
	(25, 50]	0.0	0.000000	33.367243	38.901345	44.117647	0.0	16.666667	11.889401	13.214740	12.345679	0.0	20.01																																																																																																																																					
	(50, 100]	0.0	29.489603	32.119914	33.060854	NaN	0.0	6.927176	10.766046	12.565905	NaN	0.0	10.61																																																																																																																																					

1. Current balance is divided into 3 quantiles
2. It is visible at first look that for low current balance more number of customers are churning
3. For the first quantile of current balance, More than 18% (overall average churning) of customers are churning and for second and third quantile percentage of churning customers is less than 18%
4. In first quantile of current balance, for self employed profession as the age increases for customers, their churning proportion decreases. This means that Young Self employed Customers are more prone to churn
5. There is a visible gap in proportion of Self employed females who lie in the age group of (0,25) and Self employed Males who lie in the same group. Young Male Self employed customers are churning more than young female self employed customers

- **Visualising – Age, Occupation and Churn**

Input	<pre>def Grouped_Box_Plot(data, cont, cat1, cat2): sea.boxplot(x=cat1, y=cont, hue=cat2, data=data, orient='v') plt.title('Boxplot') Grouped_Box_Plot(data,'age', 'occupation', 'churn')</pre>
-------	---

Output

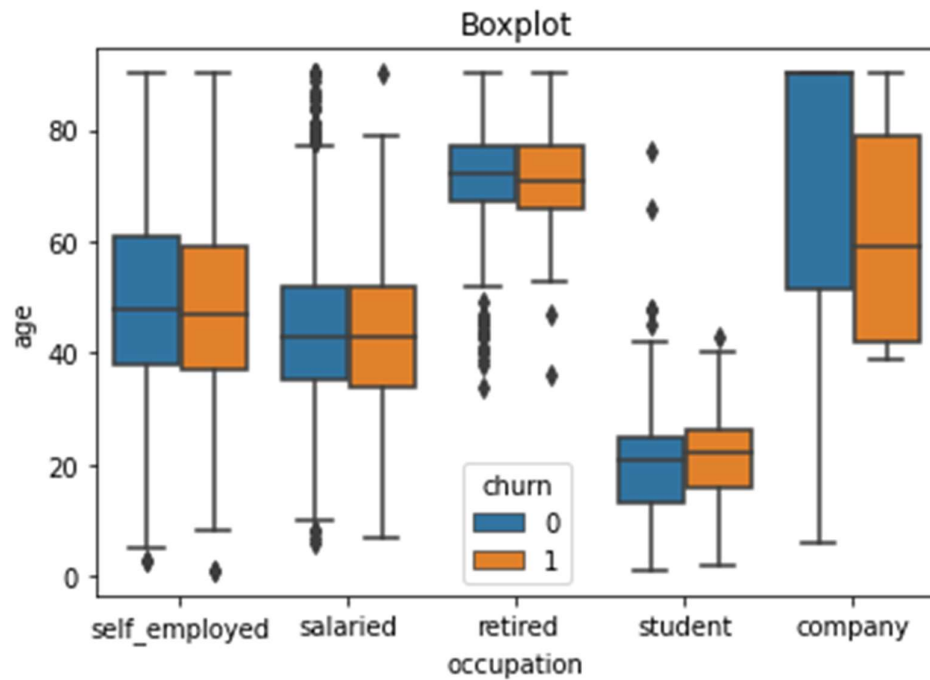


1. For Self-employed profession churning customers are slightly younger than non churning customers
2. In the retired occupation for non churning customers, there are many outliers that indicate young people who retire early are not churning

- **Visualizing – Vintage, Gender & Churn**

Input	<code>Grouped_Box_Plot(data,'vintage','gender', 'churn')</code>
-------	---

Output

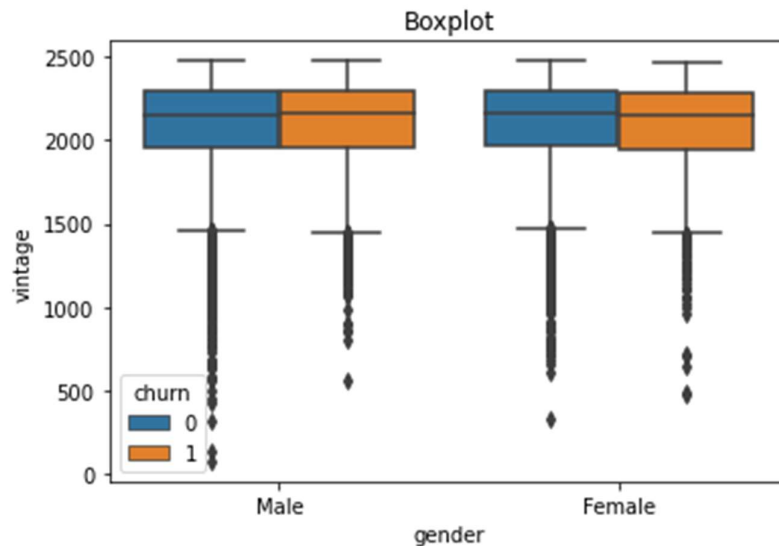


1. There is no visible difference in the vintage feature for gender-wise churning and non churning customers

15. Visualizing the Inferences up till now

- **Churn vs Current & Previous Month Balance**

Input	<pre> balance_cols = ['current_balance','previous_month_end_balance', 'current_month_balance', 'previous_month_balance'] data1 = pd.DataFrame() for i in balance_cols: data1[str('log_')+ i] = np.log(data[i] + 6000) log_balance_cols = data1.columns data1['churn'] = data['churn'] sea.pairplot(data1,vars=log_balance_cols,hue ='churn',plot_kws={'alpha':0.1}) plt.show()</pre>
-------	--

Output

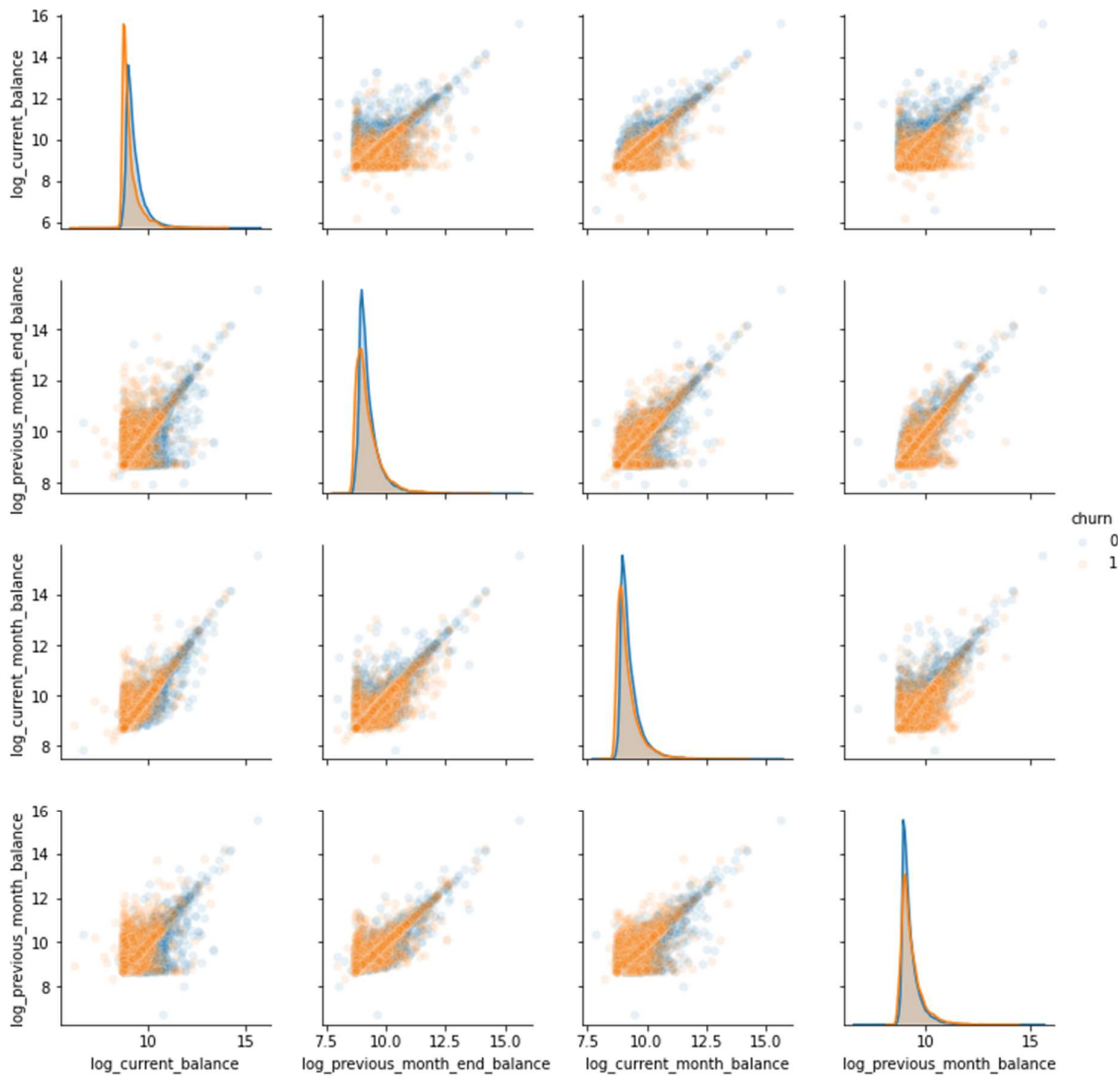


1. There is high correlation between the previous and current month balances which is expected
2. The distribution for churn and not churn is slightly different for both the cases

- **Credit & Debit for Current & Previous Months**

Input	<pre> cr_dr_cols = ['current_month_credit','previous_month_credit', 'current_month_debit', 'previous_month_debit'] data1 = pd.DataFrame() for i in cr_dr_cols: data1[str('log_')+ i] = np.log(data[i]) log_dr_cr_cols = data1.columns data1['churn'] = data['churn'] sea.pairplot(data1,vars=log_dr_cr_cols, hue = 'churn',plot_kws={'alpha':0.5}) plt.show() </pre>
-------	---

Output

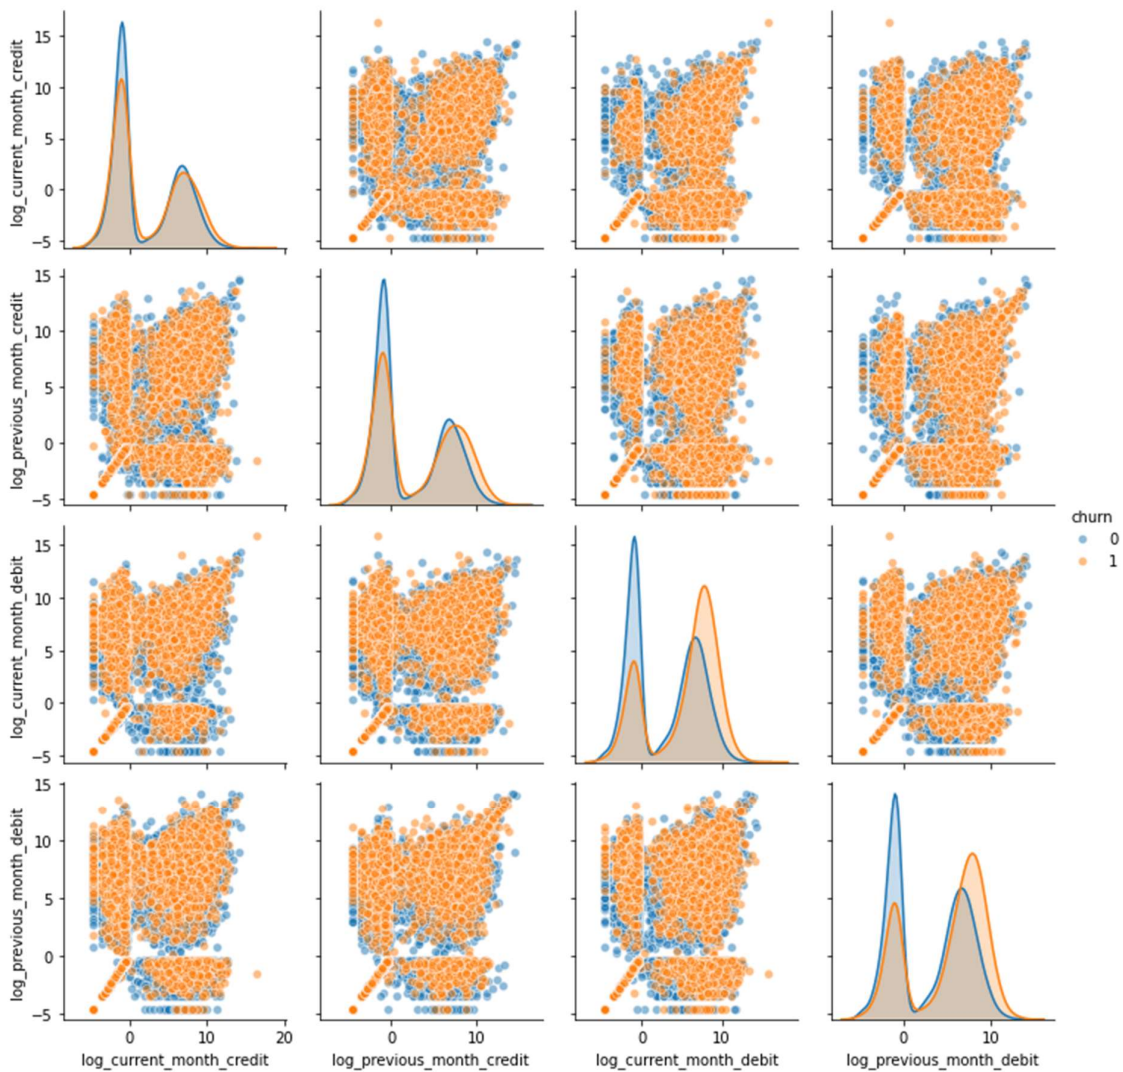

1. The plots show that there are 2 different types of customers with 2 brackets of credit and debit.
2. For debit values, we see that there is a significant difference in the distribution for churn and non-churn.

16. Preparing the data for Modelling

- To make sure every variable has a corresponding numerical value

Input	<pre>data_encoded = pd.get_dummies(data, drop_first=True) data_encoded.head()</pre>
-------	---

Output

	customer_id	vintage	age	dependents	city	branch_code	current_balance	previous_month_end_balance	average_monthly_balance_prevQ	average_monthly_balance_currQ
0	1	2101	66	0	187.0	755.0	1458.71	1458.71	1458.71	1458.71
1	2	2348	35	0	NaN	3214.0	5390.37	8704.66	7799.26	7799.26
2	4	2194	31	0	146.0	41.0	3913.16	5815.29	4910.17	4910.17
3	5	2329	90	<NA>	1020.0	582.0	2291.91	2291.91	2084.54	2084.54
4	6	1579	42	2	1494.0	388.0	927.72	1401.72	1643.31	1643.31

5 rows × 388 columns

- **Replacing Missing values with modal numbers**

Input	<pre>def fill_mode(df): for column in df.columns: df[column].fillna(df[column].mode()[0], inplace=True) fill_mode(data_encoded)</pre>
-------	--

- **Splitting data into dependent and independent variables**

Input	<pre>data_encoded = data_encoded.drop('customer_id', axis=1) x = data_encoded.drop(['churn'], axis=1) y = data_encoded['churn'] x.shape, y.shape</pre>
Output	<pre>((28382, 386), (28382,))</pre>
Input	<pre>data_encoded.columns</pre>
Output	<pre>Index(['vintage', 'age', 'dependents', 'city', 'branch_code', 'current_balance', 'previous_month_end_balance', 'average_monthly_balance_prevQ', 'average_monthly_balance_prevQ2', 'current month credit', ..., 'last_transaction_2019-12-23', 'last_transaction_2019-12-24', 'last_transaction_2019-12-25', 'last_transaction_2019-12-26', 'last_transaction_2019-12-27', 'last_transaction_2019-12-28', 'last_transaction_2019-12-29', 'last_transaction_2019-12-30', 'last_transaction_2019-12-31', 'last_transaction_NaT'], dtype='object', length=387)</pre>

- **Splitting the data into Training and Test data sets**

Input	<pre>from sklearn.model_selection import train_test_split train_x, test_x, train_y, test_y = train_test_split(x, y, random_state = 56)</pre>
-------	--

- Normalizing the Data

Input	<pre>from sklearn.preprocessing import MinMaxScaler scaler = MinMaxScaler() cols = train_x.columns cols</pre>
Output	<pre>Index(['vintage', 'age', 'dependents', 'city', 'branch_code', 'current_balance', 'previous_month_end_balance', 'average_monthly_balance_prevQ', 'average_monthly_bala nce_prevQ2', 'current_month_credit', ... 'last_transaction_2019-12-23', 'last_transaction_2019- 12-24', 'last_transaction_2019-12-25', 'last_transaction_2019- 12-26', 'last_transaction_2019-12-27', 'last_transaction_2019- 12-28', 'last_transaction_2019-12-29', 'last_transaction_2019- 12-30', 'last_transaction_2019-12-31', 'last_transaction_NaT'] , dtype='object', length=386)</pre>
Input	<pre>train_x_scaled = scaler.fit_transform(train_x) train_x_scaled = pd.DataFrame(train_x_scaled, columns=cols) train_x_scaled.head()</pre>

Output

	vintage	age	dependents	city	branch_code	current_balance	previous_month_end_balance	average_monthly_balance_prevQ	average_monthly_ba
0	0.928007	0.348315	0.000000	0.378034	0.499686	0.002316	0.001973	0.000966	
1	0.929255	0.516854	0.000000	0.009102	0.199749	0.000937	0.000563	0.000011	
2	0.956305	0.808989	0.000000	0.618932	0.232796	0.001390	0.000922	0.000114	
3	0.642530	0.258427	0.000000	0.906553	0.210625	0.001194	0.000870	0.000132	
4	0.897628	0.494382	0.019231	0.665049	0.019034	0.010039	0.011464	0.011463	

5 rows × 386 columns

Input	<pre>test_x_scaled = scaler.transform(test_x) test_x_scaled = pd.DataFrame(test_x_scaled, columns=cols) test_x_scaled.head()</pre>
-------	--

Output

	vintage	age	dependents	city	branch_code	current_balance	previous_month_end_balance	average_monthly_balance_prevQ	average_monthly_ba
0	0.933000	0.516854	0.019231	0.747573	0.021334	0.001343	0.000952	0.000220	
1	0.841448	0.337079	0.000000	0.665049	0.018406	0.001781	0.001474	0.000652	
2	0.917603	0.629213	0.000000	0.374393	0.047689	0.001189	0.000873	0.000020	
3	0.712859	0.269663	0.000000	0.618932	0.230914	0.000911	0.000578	0.000902	
4	0.927591	0.853933	0.000000	0.248180	0.068605	0.000986	0.000654	0.000241	

5 rows × 386 columns

THE DATA TO BE USED FOR MODELLING IS READY

Code Output

Input	<pre>from sklearn.linear_model import LogisticRegression as LogReg from sklearn.metrics import accuracy_score logreg = LogReg() logreg.fit(train_x, train_y) train_predict = logreg.predict(train_x) train_predict k = accuracy_score(train_predict, train_y) print('Training accuracy_score', k) test_predict = logreg.predict(test_x) k = accuracy_score(test_predict, test_y) print('Test accuracy_score ', k)</pre>
Output	<pre>Training accuracy_score 0.8235929719064173 Test accuracy_score 0.8275084554678692</pre>

Inference

As can be seen from the Code Output, the variables encoded when normalizing the data does affect the probability whether a customer would churn or not. Churn is expressed as a degree of customer inactivity or disengagement, observed over a given time. Based on the recency of activity which can be viewed from the encoded variables one can predict by an accuracy of 82.75% whether the customer of the bank will churn or not.